

C형 (부분선택가능)


N형 (5010만 선택가능)

D형 (φ16~φ40)

(unit : mm)

축경 (φ)	형번	리드	φD	φD1	L	L1	W	PCD	φx	φy	z	Q
8	SFKC 0802	D 2	14	27	16	4	18	21	3.4	-	-	-
10	SFKC 1002	D 2	18	35	28	5	22	27	4.5	-	-	-
12	SFKC 1202	D 2	20	37	28	5	24	29	4.5	-	-	-
16	SFDC 1605	D 5	30	49	50	10	34	39	4.5	8	4.5	M6
		C 5	30	49	50	10	-	39	4.5	-	-	M6
	SFDC 1610	D 10	30	49	55	10	34	39	4.5	8	4.5	M6
20	SFDC 2005	D 5	34	57	51	11	40	45	5.5	9.5	5.5	M6
		C 5	34	57	51	11	-	45	5.5	-	-	M6
25	SFDC 2505	D 5	40	63	51	11	46	51	5.5	9.5	5.5	M8
		C 5	40	63	51	11	-	51	5.5	-	-	M8
	SFDC 2510	D 10	46	72	85	12	52	58	6.5	11	6.5	M6
32	SFDC 3205	D 5	46	72	52	12	52	58	6.5	11	6	M8
		C 5	46	72	52	12	-	58	6.5	-	-	M8
	SFDC 3210	D 10	54	88	90	15	62	70	9	14	8.5	M8
40	SFDC 4010	D 10	62	104	93	18	70	82	11	17.5	11	M8
50	SFDC 5010	D	72	114	93	18	82	92	11	17.5	11	M8
		N					-					

© SFK 너트는 자리파기(카운터보어)와 오일홀이 없습니다.

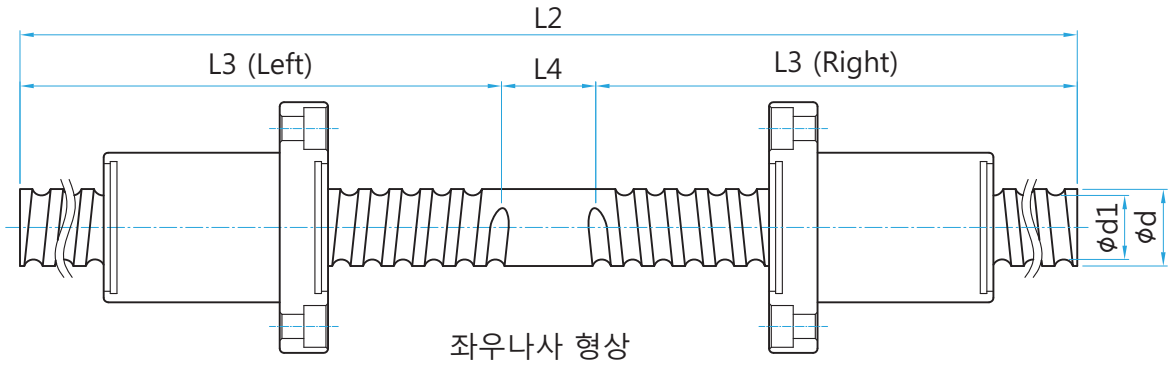

(unit : mm)

부하 회로수	볼경	Ca (kgf)	Coa (kgf)	강성	축경 ϕd	축 호칭	$\phi d1$	L2	L3	L4			
3x1	1.2	222	458	13	8	RL0802	7.2	310	150	10			
3x1	1.2	243	569	15	10	RL1002	9.2	400	195	10			
4x1	1.2	334	906	22	12	RL1202	11.2	430	210	10			
4x1	1/8"	1380	3052	33	16	RL1605	13.9	530	250	30			
											730	350	30
4x1	1/8"	1380	3052	33							930	450	30
											1130	550	30
4x1	1/8"	1103	2401	27	20	RL1610	13.9	730	350	30			
											930	450	30
											1130	550	30
											1630	800	30
4x1	1/8"	1551	3875	39	25	RL2005	17.9	530	250	30			
											730	350	30
											930	450	30
											1130	550	30
4x1	1/8"	1551	3875	39	32	RL2505	22.9	1630	800	30			
											930	450	30
											1130	550	30
											1630	800	30
4x1	3/16"	2954	7295	51	32	RL2510	20.8	930	450	30			
											1130	550	30
											1630	800	30
											2030	1000	30
4x1	1/8"	1922	6343	52	40	RL3205	29.9	1130	550	30			
											1630	800	30
											1130	550	30
											1630	800	30
4x1	1/4"	4805	12208	62	50	RL3210	27.9	1130	550	30			
											1630	800	30
											1130	550	30
											2030	1000	30
4x1	1/4"	5399	15500	72	50	RL4010	35.8	1130	550	30			
											2030	1000	30
											1130	550	30
											2030	1000	30
4x1	1/4"	6004	19614	83	50	RL5010	45.8	1130	550	30			
											2030	1000	30
											1130	550	30
											2030	1000	30

Ca : 동정격하중 Coa : 정정격하중
강성 : kgf/ μ m